

3M™ Super Close Projection System SCP717


If you have a mid-sized or space challenged classroom, conference room or boardroom that needs the latest innovations in projection technology, the 3M Super Close Projection System SCP717 delivers. One of the first high-brightness, DLP™, super close projectors to enter the market, the SCP717 features Brilliant Color™, DVI-D connectivity, an RJ-45 ethernet connection and an integrated wind tunnel design to minimize heat and fan noise. The extreme off-axis short throw makes the SCP717 a great choice to replace traditional ceiling mount projectors because it greatly reduces light in the presenter's eyes. The fully integrated connectivity makes it the perfect tabletop media hub too!



3M SCP717 Projector
78-9236-7701-3

Features

- Two computer/component RGB inputs
- One computer RGB output
- RJ-45 ethernet connection provides network capabilities and basic remote administration
- RS232 connection for basic remote control
- +5V/2A DC power output
- S-video input for connecting a DVD/analog video device
- DVI-D connection
- RCA Audio/Video for camcorders, digital cameras, gaming and more
- One USB port for remote mouse
- Audio output connection for external speakers

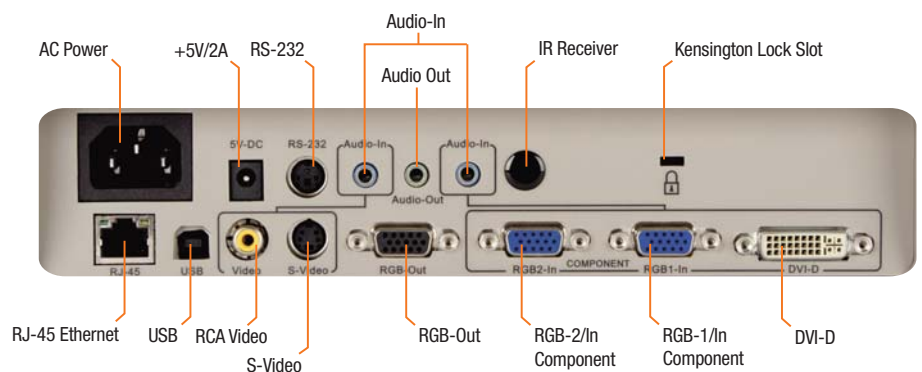

Optical

Vikuiti™ Super Close Projection Technology by 3M

DMD Panel

.7 in. DLP

Resolution

True XGA (1024 x 768)

Aspect Ratio

4:3 native, 16:9 supported

Contrast Ratio

1600:1

Digital Zoom

100% to 200%

Brightness

3000 lumens (maximum rating)

Projection Lens

F2.5

Throw Ratio (Distance: Image Width)

0.68

Image Size (range)

30-120 inches (.76m-3.04m)

Focus

Manual

Lamp

260W (normal mode), 220W (eco mode)

Lamp Life

2000 hours (normal)

Up to 3000 hours (eco)

Security

Integrated Kensington Lock Slot
(security kit, optional upgrade)

Size

Dimensions (W x D x H)

14 x 12.2 x 5 in. (360 x 309 x 126mm)

Weight

10 lbs (4.5kg)

System Specifications

Video Compatibility

NTSC, PAL, SECAM, 480i/p (1080i), 720p

PC Compatibility

640 x 480 (VGA), 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1280 x 960* (iMAC), 1152 x 870* (MAC), 1024 x 768 (MAC 19")

*resolution digitally compressed

Digital Keystone Correction

Vertical ± 16 degrees

Audio Output

Two 2 Watt integrated speakers

Noise Level

Normal 36dB; eco 33dB

Power Consumption

360W (Max, <5W eco Stand by)

Power Supply

Universal: 100-240VAC, 50/60Hz

Regulatory Approvals

FCC Class B, CCC for China, NOM, EK, cULus, CE Class B, RoHS, WEEE, Nemko, CE-TUV, PSB, SABS, IRAM, ASNZS, UL

Technical Support

- Free unlimited software downloads and updates available on our website at www.3m.com/meetings



Accessories Included

1.8m power cord (US, UK, Europe)
1.8m 15 pin D-sub VGA cable
3.5mm audio cable
USB cable
Remote control with batteries
Multi-Language Operator's Guide (CD)
Quick Start Guide
Product Safety Guide
WEEE card (EMEA)

Optional Accessories

SCP740 Lamp Replacement Kit 78-6969-9957-8
C1 Universal Ceiling Mount -black 78-6969-9928-9
C1 Universal Extender Pole
& Plate -black 78-6969-9927-1
(Order if required to match SKU 78-6969-9928-9)
P1 Universal ceiling mount -white 78-6969-9874-5
Kensington Lock/Key Security Kit 78-6969-9961-0

Image Size	
Screen Size Diagonal [inch (m)]	Projection Distance Maximum [inch (m)]
60" (1.5)	32.6" (0.82)
70" (1.7)	38.1" (0.97)
80" (2.0)	43.5" (1.10)
90" (2.3)	48.9" (1.20)
95" (2.4)	51.7" (1.30)
100" (2.5)	54.4" (1.38)

Note: These sizes are ± 10 percent. This is due to variations in the manufacture of the lens. If you are close to one of the endpoints you should verify with your unit that the image is the proper size at the proper distance.



www.3M.co.uk/meetings



3M Projection Systems

3M United Kingdom plc

Tel: 01234 229695

Email: 3Mpresentations@mmm.com

www.3M.co.uk/meetings

3M Ireland

Tel: +353 (0) 1 280 3555

Email: 3Mpresentations@mmm.com

www.3M.ie/meetings

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Specifications subject to change without notice.

3M and the 3M logo are trademarks of 3M Company. Used under license in Canada. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.