Panasonic



Professional LCD Television

TH-42LRG20E

Product specification (design and specification subject to change without notice)

ח	ıc	DΙ	ΙΔ	v

Screen Size (Diagonal)	42-inch (106 cm)
Aspect ratio	16:9
Panel	IPS LCD Panel
Number of pixels (H x V)	1,920 x 1,080 pixel
Brightness (Panel)	500 cd/m ²
Contrast Ratio (Dynamic)	20,000 :1*1
Viewing Angle	178 degrees (CR≧10)

^{*1:} The ratio of the brightness of a screen displaying an all-white signal to the brightness of a screen displaying an all-black signal.

■TV TUNER

- IV IONEIX	
Integrated Tuners*	PAL -B/G/H, -I, -D/K: SECAM -B/G, -D/K, L/L'; DVB-T, DVB-T (MPEG4-AVC [H.264]),
	DVB-C (MPEG4-AVC [H.264])AVC [H.264])
Teletext Reception	1000P TOP/FASTEXT Level 2.5

■SIGNAL COMPATIBILITY

Applicable Scanning Format Full-HD	1125 (1080)/50i, 1125 (1080)/60i, 1125 (1080)/24p (HDMI only),	
	1125 (1080)/50p (HDMI only), 1125 (1080)/60p (HDMI only)	
HD	750 (720)/50p, 750 (720)/60p	
SD	525 (480)/60i, 525 (480)/60p, 625 (576)/50i, 625 (576)/50p	
PC Signal	600 x 400, 640 x 480, 800 x 600, 832 x 624, 1024 x 768, 1152 x 864, 1280 x 768, 864 x 512	

■CONNECTION TERMINAL CI (Common Interface)

HDMI Input	HDML x 2 (rear)	
Support Feature	Audio Return Channel (Input 2)	
Composite Video Input	RCA x 1 (rear)	1.0 V [p-p] (75Ω)
Component Video Input	RCA x 3 (rear)	Y : with sync 1.0 V [p-p] (75Ω)
		P _B , P _R : 0.7 V [p-p] (75Ω)
PC Input	MINI D-SUB 15PIN x1 (Female)	G : with sync 1.0 V [p-p] (75Ω)
		B, R : 0.7 V[p-p] (75Ω)
		HD/VD: 1.0~5.0 V [p-p] (high impedance)
Audio Input (Composite, Component, PC)	RCA (L/R) x 1 set (rear)	0.5 V [rms]
Analogue Audio Output	RCA (L/R) x 1 set (rear)	
Digital Audio Output (Optical)	1(rear)	
Headphone Jack	M3 jack x 1 (side)	
Ir through	M3 jack x 1 (rear)	
Serial (RS232C)	M3 jack x 1 (rear)	
SD Card Slot	Yes	
SCART (21-Pin Input/Output)	AV In/Out, S-Video In, RGB In, Q-Link (rear)	
■ELECTRICAL		
Power Requirements	AC 220 - 240 V 50 Hz	

Power Requirements	AC 220 - 240 V, 50 Hz
Power Consumption	182W
On Mode Average Power Consumption*2	141W
Stand-by / Power off condition	0.25W / 0.2W
*2.5. 155,52007	

^{*2:} Based on IEC 62087 measurement method.

■AUDIO

Audio Output Power	10VV + 10VV (10%1HD)
Invisible Speaker System Details	1 way 2 bottom Speaker
Virtual Surround	V-Audio
Dolby Digital/dts Out	Dolby Digital Plus/dts Out

■DIMENSIONS & WEIGHT

TV with Stand (W x H x D)	1,021 x 682 x 310 mm
TV without Stand (W x H x D)	1,021 x 637 x 109 mm
Carton Dimensions (W x H x D)	1,314 x 729 x 214 mm
TV with Stand Weight	approx. 19.6 kg
TV without Stand Weight	approx. 17.0 kg
Gross weight	approx. 26.0 kg
Cabinet Color	Glossy Black

■ENVIRONMENTAL

Operating environment	Temperature	: 0℃ to 35℃
	Humidity	: 20% to 80% (Non condensation)
Storage environment	Temperature	: -20℃ to 50℃
	Humidity	: 20% to 65% (Non condensation)
	Humidity	: 20% to 65% (Non condensation)

^{*}Notice for DVB functions:
This TV is designed to meet the standards (current as of August, 2009) of DVB-T/C (MPEG2 and MPEG4-AVC [H.264]) services. The compatibility with future DVB services is not guaranteed.

DVB-T MPEG4-AVC broadcast is available in selected countries: Denmark, Spain, Estonia, France, Lithuania, Norway, Slovenia, Sweden, Poland, Hungary, Portugal.

DVB-C feature is available only in following countries: Sweden (ComHem, Canal Digital), Demark (YouSee), Norway (Canal Digital), Finland (Cable Ready HD), Germany, Switzerland, Netherlands The country list above is as of January 1st, 2010. Check the latest information on the available services at the following website (English only):http://panasonic.jp/support/global/cs/tv/

MAIN FEATURE

CD Canal	In a second Manager (A) (CLID (IDEC or leaders als)
SD Card	Image Viewer (AVCHD/JPEG playback)
	Cloning
EPG (Now and Next)	Yes
EPG for DVB-T (7days)	Gemstar EPG: Italy, Germany,
	Spain; 7-Days SI EPG: France,
	Sweden
VIERA Link	Y (HDAVI Control 5)
Multi Window	PAT
Welcome Message	Yes
Eco Mode*	Yes
Game Mode	Yes
Q-Link	Yes
OFF Timer	15/30/45/60/75/90
Initial INPUT	Yes
INPUT Lock	Yes
Initial VOL level	Yes
Maximum VOL level	Yes
Bottom Lock	Yes
Remote control User Level	Yes


^{*}Contrast Automatic Tracking System

ACCESSORIES

INCLUDED ACCESSORIES	Pedestal
	Converter Cable (M3 to D-sub 9pin)
	Remote control transmitter
	Operating Instruction
OPTIONAL ACCESSORIES	Wall hanging bracket (TY-WK3L2RW)
	VESA Compliant W200xH200


■ STANDARD (CERTIFICATIONS)

SA	AFETY REGULATIONS	EN60065;2002/CE Mark/BEAB Mark
R/	ADIATION REGULATIONS	EN55013/EN55020/EN61000-3-2/
		EN61000-3-3/EN55022 (ClassB)/
		FN55024

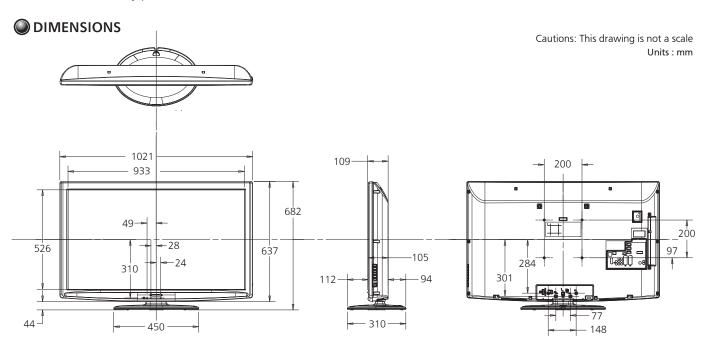

ONNECTION TERMINAL

<rear>

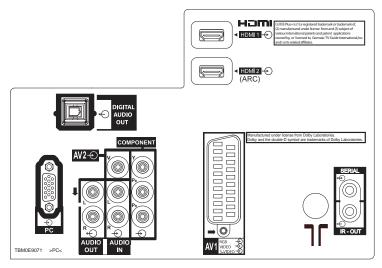

<side>

